



Roll Prongs

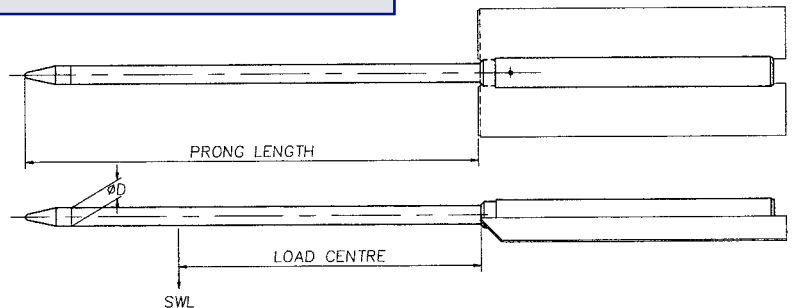

Type RPS

Slip-on roll prong suitable for fabric, cable and coil products. Can also be used for carpet handling, but usage is generally restricted to larger forklifts due to the extended load centre created by the length of the tines. These attachments quickly adapt to almost any forklift and require only the connection of a safety chain to prevent unintentional disengagement. Prongs are manufactured from high tensile steel and can be made to any length.

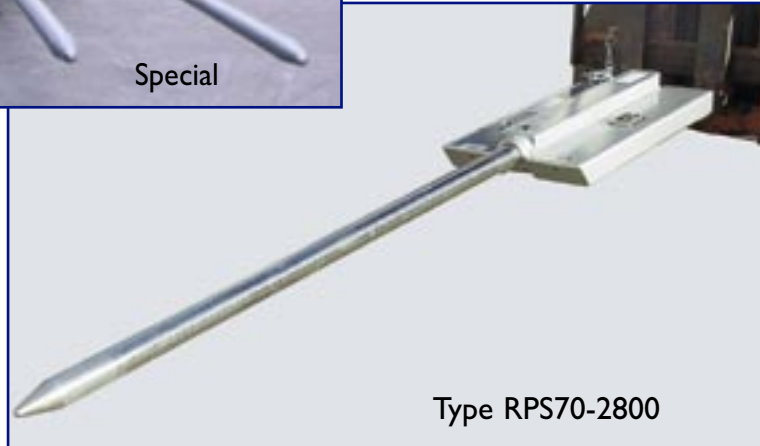

Type	Diameter mm	Prong Length m	SWL kg	Load Centre m	Weight kg
RPS 40 - 1200	40	1.2	200	0.6	80
RPS 50 - 1200	50	1.2	400	0.6	90
RPS 60 - 1200	60	1.2	800	0.6	105
RPS 60 - 2800	60	2.8	340	1.4	140
RPS 70 - 1200	70	1.2	1200	0.6	115
RPS 70 - 2800	70	2.8	515	1.4	165
RPS 82 - 1200	82	1.2	2000	0.6	130
RPS 82 - 2800	82	2.8	855	1.4	200
RPS 92 - 1200	92	1.2	3000	0.6	160
RPS 92 - 2800	92	2.8	1285	1.4	220
RPS 102 - 1200	102	1.2	4000	0.6	200

Special Length and Diameter available on request