


Container Ramp

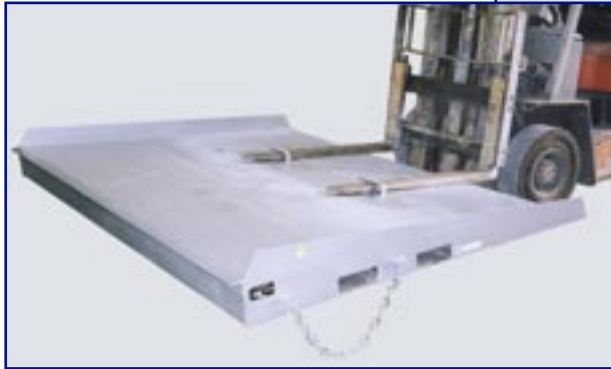

Type CRS 6 Container Ramp

Fast positioning and removal with the CRS 6 ramp. Fitted with fork pockets either side, along with front flip-ups allows placement in confined areas. Securing safety chains both sides for connection of the ramp

to the container. Raised side plates prevent the forklift from driving off the side. Full gusseting under eliminates fatigue of the tread plate decking.

- Size 1.8m length x 2.4m wide x 160mm height, ground to ramp deck
- Structural capacity 6000kg SWL
- Unit weight 460kg
- Enamel paint finish



Type CRL 6 Container Ramp

With a 3.0 metre overall length (1.5 metres of which is horizontal) this style allows easy placement and removal of the first and second line of pallets in a container. Fork pockets are provided either side of the ramp, along with flip-up front brackets. Securing chains both side prevent unintentional disengagement of the ramp from the container.

- Size 3.0m length x 2.4m wide x 160mm height, ground to ramp deck
- Structural capacity 6000kg SWL
- Unit weight 600kg
- Enamel paint finish