

Forklift Attachments

Hydraulic Extension Reachforks

Type RG Reachforks

Reachforks are hydraulically extendable and retractable forks which allow for 'double-deep' stacking, increasing warehouse capacity by up to 30% compared to 'single-deep' warehouse operations.

Reachforks also allow trucks to be loaded & unloaded from one side eliminating the need to turn the vehicle or drive the forklift to the opposite side making the operation much safer. To operate the reachforks, the forklift requires one additional hydraulic function.

Options available:


- Pallet Stops – preventing the reachforks from protruding through to the rear pallet
- Load Guards – custom made to suit if required



Reachforks Retracted



Reachforks Extended

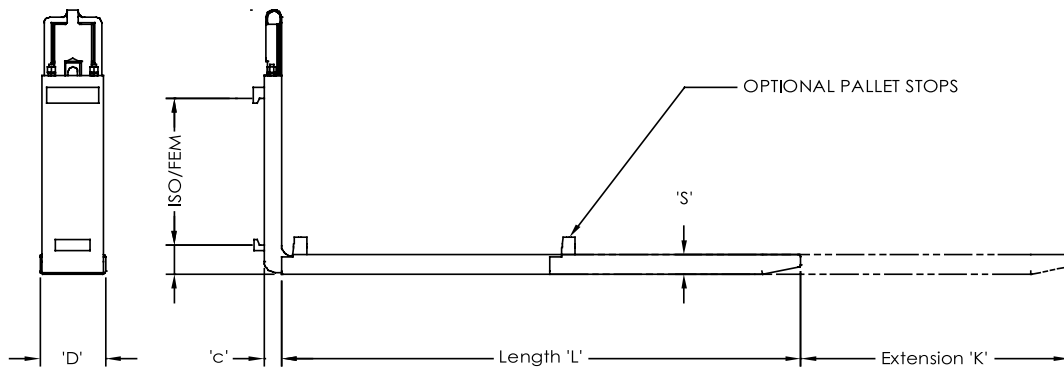

Type	Length "L" (mm)	Extension "K" (mm)	Cross Section "D" x "S" (mm)	SWL (kg) at 600mm Load Centre (mm)	Weight Per Pair (kg)	ISO/FEM Mounting Class
RG2 30 1100 / 750	1100	750	140 x 56	3000	165	Class II
RG2 30 1200 / 850	1200	850	140 x 56	3000	175	Class II
RG2 30 1350 / 1000	1350	1000	140 x 56	3000	190	Class II
RG4 25 1100 / 750	1100	750	170 x 56	2500	175	Class II
RG4 25 1200 / 850	1200	850	170 x 56	2500	185	Class II
RG4 25 1350 / 1000	1350	1000	170 x 56	2500	200	Class II
RG4 35 1200 / 850	1200	850	170 x 56	3500	210	Class II / III
RG4 35 1350 / 1000	1350	1000	170 x 56	3500	230	Class II / III
RG4 45 1200 / 850	1200	850	170 x 56	4500	215	Class III
RG4 45 1350 / 1000	1350	1000	170 x 56	4500	235	Class III

To ensure correct selection of reachforks, please contact East West Engineering to discuss your particular application and specifications.